


TEC1636

16mm brushless motor



接线方式 C		Connection Mode C	
正反转功能		Clockwise Rotation/Counter Clockwise Rotation	
信号输出功能		FG Signal	
脉宽调速功能		PWM Control	
锁定保护		Locked Rotor Protection	
最大功率	3W(内置驱动)	Power	3W(Internal Drive)
	/		/
电机寿命	约3000H(含油轴承)	Life Expectancy	~3000H(Oil Bearing)
	/		/


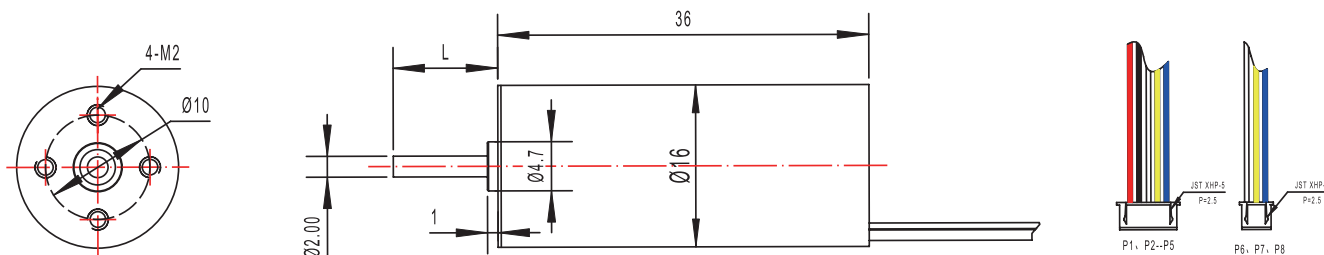


Weight: 30g(Approx)

Unit(mm)

单电机技术参数 Motor Technical Data

电机型号 Motor model	额定电压 Rated voltage	无负荷 No-load		额定 Rated				堵转 Stall	
	VDC	转速 Speed	电流 Current	转速 Speed	力矩 Torque	电流 Current	功率 Power	力矩 Torque	电流 Current
		r/min	mA	r/min	g.cm	mA	W	g.cm	A
TEC1636-12120	12V	12000	70	10082	32.6	390	3.37	204	2.1
TEC1636-24120	24V	12000	40	10189	32.6	180	3.41	216	1.0

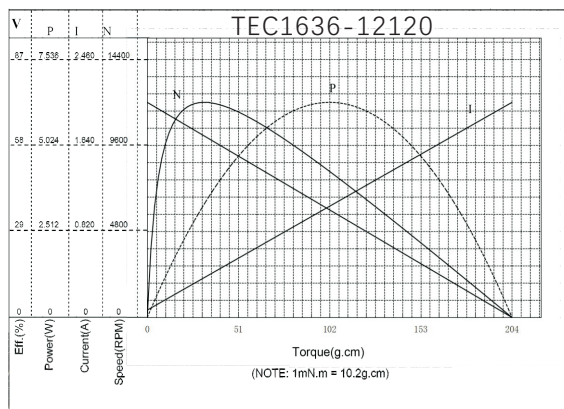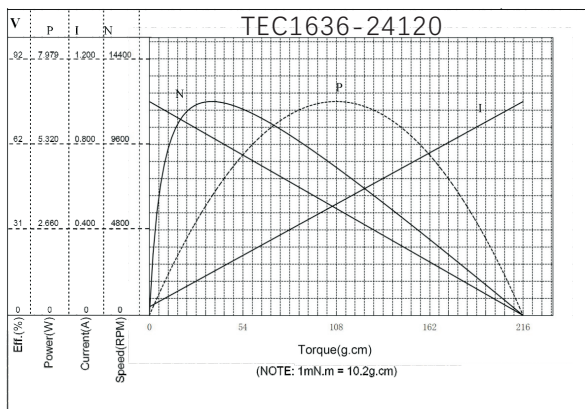

备注：红线左侧为电机可以连续工作区域 NOTE: the left side of red line area can continuous work